

caroma®



Sydney 1.6 gal (6 L) & Sydney Smart 1.28 gal (4.8 L) 305 Round Front & Elongated Bowl.

Vitreous China Dual Flush Low Consumption, Two Piece Washdown Toilets.

PLUMBERS INSTALLATION INSTRUCTIONS PLEASE READ CAREFULLY BEFORE INSTALLATION

Rough in:

It is essential for the installation of the Sydney 305 Two Piece Washdown toilets that the closet flange be accurately set out from the finished wall as detailed in **Fig. 3**.

IMPORTANT:

Reducing Wax rings must not be used when installing this toilet pan, as detailed in **Fig. 2**.

Working Water Pressure:





USA & Canada: Recommended working water pressure is 20-80psi (140-550Kpa).

Closet Bowl Fixing Procedure:

- 1- Position 'T' bolts into closet flange, as detailed in **Fig. 3**.
- 2- Position wax seal onto closet flange.
- 3- Ensure that the area around the closet bowl is clean and free from building material.
- 4- It is recommended that a bead of acetic cured silicone caulking is applied fully around base of the closet bowl.
- 5- Accurately align the closet bowl over the closet flange and lower into position.
- 6- Secure Closet bowl by hand tightening nuts and washers onto the 'T' bolts.
Apply an additional 1/2 turn for final installation.
- 7- Remove any excess silicone caulking.

Tank Fixing Procedure:

- 1- Ensure the foam seal is fitted onto the tail piece on the underside of the tank, as detailed in **Fig. 4**.
- 2- Lower tank onto closet bowl, allowing the two tank fixing bolts protruding below the tank to locate in the corresponding holes in the closet bowl.
- 3- Fit the plastic wing nuts provided onto the tank fixing bolts which are protruding through the closet bowl and gradually tighten the left and right hand nuts by hand to evenly secure tank to closet bowl.
- 4- Connect water supply and check operation.

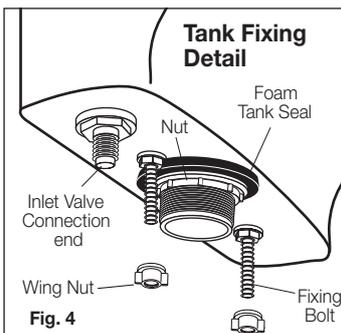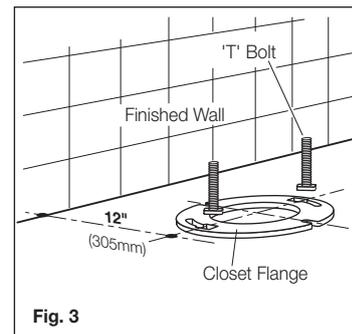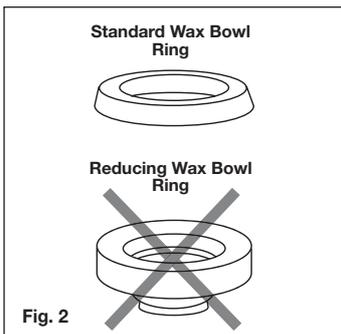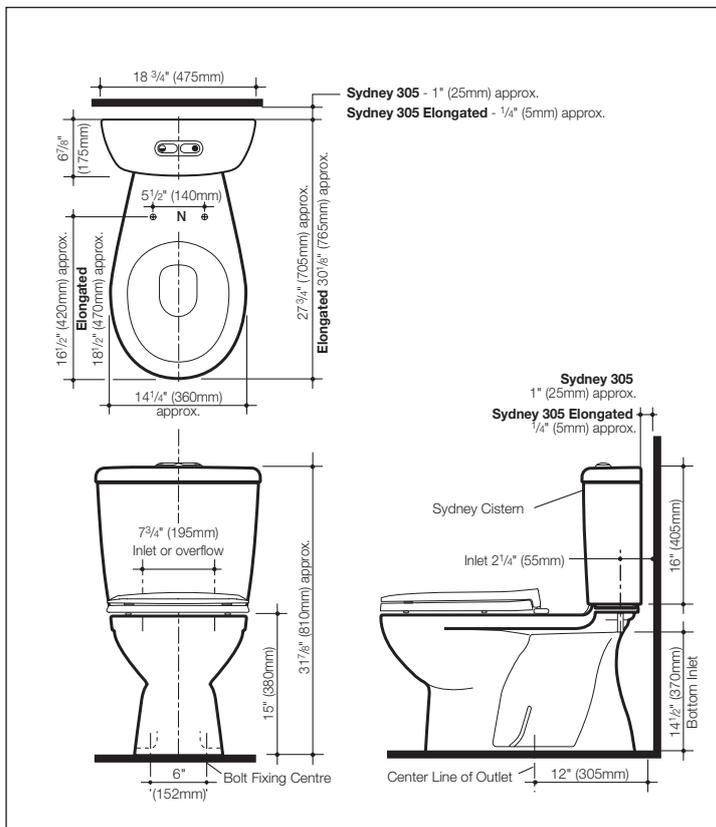

(N) Non standard item. (Canada)

All measurements are subject to accepted manufacturing tolerances. To ensure complete accuracy please check actual product dimensions before drilling for installation.

The manufacturer reserves the right to change specifications at any time without giving prior notification.

This product should be installed by a qualified plumber. Local authority, Water Board, and Building Regulations may apply to the installation of this product, and you should consult the appropriate bodies on these requirements. Failure to comply may invalidate the product warranty.