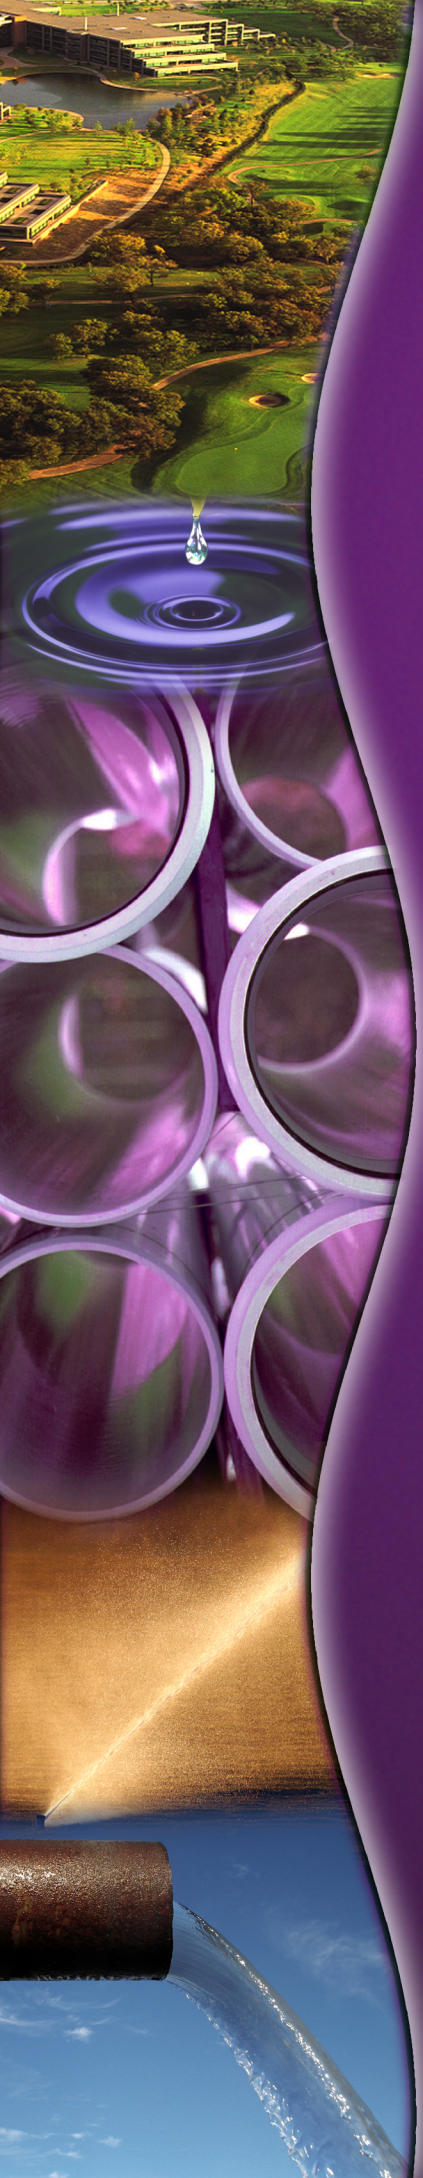

FINAL REPORT

FORT WORTH

Reclaimed Water Priority and Implementation Plan

May 2007

Submitted by:

ALAN PLUMMER ASSOCIATES, INC.
ENVIRONMENTAL ENGINEERS • DESIGNERS • SCIENTISTS

in association with:

CP&Y

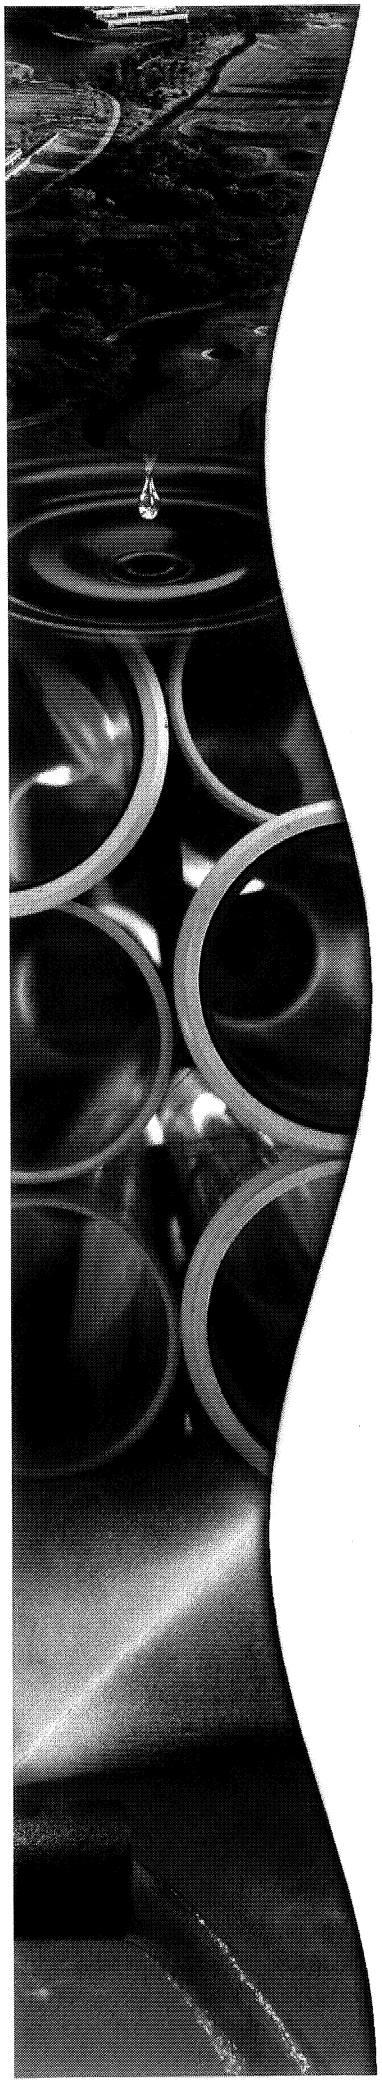

FINAL REPORT

FORT WORTH

Reclaimed Water Priority and Implementation Plan

STATE OF TEXAS
ELLEN T. MCDONALD
84731
LICENSED
PROFESSIONAL ENGINEER

Ellen T. McDonald
5/24/07

May 2007

Submitted by:

ALAN PLUMMER ASSOCIATES, INC.
ENVIRONMENTAL ENGINEERS • DESIGNERS • SCIENTISTS

in association with:

CP&Y

CITY OF FORT WORTH

RECLAIMED WATER PRIORITY AND IMPLEMENTATION PLAN

TABLE OF CONTENTS

EXECUTIVE SUMMARY ES-1

CHAPTER 1: INTRODUCTION 1-1

1.1 Background 1-1

1.2 Project Scope 1-2

1.3 Organization 1-3

CHAPTER 2: REVIEW OF PREVIOUS CITY OF FORT WORTH REUSE PROGRAM EVALUATIONS AND RECOMMENDATIONS 2-1

2.1 Introduction 2-1

2.2 Technical Memorandum No. 12: Effluent Reuse Alternative Identification and Feasibility Analysis 2-1

2.2.1 Projects Evaluated 2-2

2.2.2 Recommendations and Insights Related to Current Study 2-3

2.3 1998 Wastewater Collection System Master Plan 2000-2020 2-3

2.3.1 Projects Evaluated 2-3

2.3.1.1 Alternatives for Wet-Weather Flow Events 2-4

2.3.2 Recommendations and Insights Related to Current Study 2-4

2.4 1999 Fort Worth Wastewater Facilities Master Plan 2000-2020 2-4

2.4.1 Projects Evaluated 2-4

2.4.1.1 Alternatives 2-4

2.4.1.2 Evaluation Matrix 2-5

2.4.2 Recommendations and Insights Related to Current Study 2-6

2.5 Village Creek Sewershed Feasibility Study 2-6

2.5.1 Projects Evaluated 2-6

2.5.1.1 Alternatives for Reuse 2-6

2.5.2 Recommendations and Insights Related to Current Study 2-7

2.6 Wastewater Conveyance and Treatment Evaluation Study 2-7

2.6.1 Projects Evaluated 2-7

2.6.1.1 Alternatives for Reuse Projects 2-7

2.6.1.2 Alternatives for West Fork Improvements 2-8

2.6.2 Recommendations and Insights Related to Current Study 2-8

2.7 Draft 2004 Comprehensive Plan 2-9

2.7.1 Projects Evaluated 2-9

2.7.2 Recommendations and Insights Related to Current Study 2-9

2.8 Draft Mary's Creek Water Recycling Center Feasibility Study 2-9
2.8.1 Projects Evaluated 2-10
2.8.1.1 Siting the Recycling Center 2-10
2.8.1.2 Alternatives for MCWRC 2-10
2.8.2 Recommendations and Insights Related to Current Study 2-11

2.9 2005 Fort Worth Water Master Plan 2-11
2.9.1 Development of Population Projections 2-12
2.9.1.1 Population Growth Rates and Population Distribution Within the Water System 2-12
2.9.2 Recommendations and Insights Related to Current Study 2-12

2.10 Conclusions 2-12

CHAPTER 3: POPULATION PROJECTIONS, WATER SUPPLY, WATER DEMAND AND TREATED WASTEWATER AVAILABILITY 3-1

3.1 Introduction 3-1

3.2 Population Projections 3-1
3.2.1 Texas Water Development Board Approach to Population Projections 3-1
3.2.2 North Central Texas Council of Government Approach to Population Projection 3-1
3.2.3 City of Fort Worth Master Plan Approach to Population Projections 3-1
3.2.4 Population Projections for the Reclaimed Water Plan 3-2

3.3 Water Supply and Demand 3-2
3.3.1 Existing and Future Water Supply 3-3
3.3.2 Existing and Future Water Demands 3-3
3.3.3 Treated Wastewater Availability 3-5
3.3.3.1 Wastewater Flow Projections for Areas Served by City of Fort Worth WWTPs ... 3-6
3.3.3.2 Wastewater Flow Projections for Denton Creek Regional Wastewater System 3-7

CHAPTER 4: POTENTIAL RECLAIMED WATER USERS AND DEMANDS 4-1

4.1 General 4-1

4.2 Potential Reclaimed Water Use Categories 4-1
4.2.1 Commercial Irrigation 4-2
4.2.2 Commercial Processes 4-2
4.2.3 Golf Course Irrigation 4-2
4.2.4 Parks and Recreational Facilities 4-3
4.2.5 Public Facilities 4-3
4.2.6 Residential Irrigation 4-3
4.2.7 Schools and Universities 4-3
4.2.8 Gas Well Drilling 4-3
4.2.9 Summary 4-4

4.3 Potential Reclaimed Water Users and Demands 4-4
4.3.1 Historical Data Analysis 4-4
4.3.2 Customer Surveys and Meetings 4-5
4.3.3 Non-Wholesale Customers and Surrounding Cities 4-5
4.3.4 Alliance Area Development in North Tarrant County 4-5
4.3.5 Mary's Creek Basin 4-7

4.3.6 Trinity River Vision Central City Project 4-8
4.3.7 City of Fort Worth – Parks and Community Services Department 4-8
4.3.8 Other Sources of Information 4-8
4.3.9 Proposal to Obtain Additional Information 4-8

4.4 Top 125 Potential Reclaimed Water Users 4-9

CHAPTER 5: RECLAIMED WATER QUALITY CONSIDERATIONS 5-1

5.1 Summary of Texas Reclaimed Water Regulations 5-1

5.2 Effluent Water Quality 5-2
5.2.1 Village Creek WWTP 5-2
5.2.2 Denton Creek RWS 5-2

5.3 Additional Quality Parameters for Specific Uses of Reclaimed Water 5-4
5.3.1 Irrigation 5-4
5.3.2 Industrial Cooling Water 5-5
5.3.3 Make-Up Water (Augmentation) 5-6
5.3.4 Other Reuse Applications 5-6

5.4 Potential Future Water Quality Requirements for City of Fort Worth WWTP Effluent 5-7

CHAPTER 6: SERVICE AREAS AND POTENTIAL PROJECTS 6-1

6.1 Introduction 6-1

6.2 Reclaimed Water Service Areas 6-1

6.3 Sources of Reclaimed Water 6-5
6.3.1 Existing Wastewater Treatment Plants 6-5
6.3.2 Water Recycling Centers 6-6

6.4 Screening-Level Evaluation of Service Area Conceptual Projects 6-6
6.4.1 Central and Southern System Service Areas 6-7
6.4.1.1 Central System Alternative 1 (C1) 6-7
6.4.1.2 Southern System Alternative 1 (S1) 6-7
6.4.1.3 Central/Southern System Alternative 1 (CS1) 6-9
6.4.1.4 Central/Southern System Alternative 2 (CS2) 6-9
6.4.1.5 Preferred Central/Southern System Alternative 6-9
6.4.2 Eastern System Service Area 6-9
6.4.2.1 Eastern System Alternative 1 (E1) 6-10
6.4.2.2 Preferred Eastern System Alternative 6-10
6.4.3 Northern System Service Area 6-10
6.4.3.1 Northern System Alternative 1 (N1) 6-10
6.4.3.2 Northern System Alternative 2 (N2) 6-13
6.4.3.3 Preferred Northern System Alternative 6-13
6.4.4 Western System Service Area 6-13
6.4.4.1 Western System Alternative 1 (W1) 6-15
6.4.4.2 Preferred Western System Alternative 6-15
6.4.5 Summary of Screening-Level Evaluation 6-15

6.5 Preferred Alternative Facilities and Phasing 6-16
6.5.1 Central/Southern System Service Area....6-16
6.5.2 Eastern System Service Area....6-18
6.5.3 Northern System Service Area 6-20
6.5.4 Western System Service Area....6-22

CHAPTER 7: PROJECT FEASIBLITY EVALUATION 7-1

7.1 Introduction....7-1

7.2 Opinion of Probable Costs 7-1

7.3 Benefits of Reclaimed Water Projects....7-2
7.3.1 Reduction of Potable Water Demand 7-2
7.3.2 Reclaimed Water as a Water Supply Source 7-3
7.3.3 Reduction in Load to Receiving Streams 7-3
7.3.4 Deferral of Water and Wastewater Treatment Plant Expansions 7-3
7.3.5 Deferral of Collection System Improvements 7-4
7.3.6 Reduction in Raw Water Requirements and Deferral of Reservoir Construction ..7-4

7.4 Net Cost of Reclaimed Water....7-7
7.4.1 Potential Impact of Capital Contributions 7-8

7.5 Financing Strategies and Funding Opportunities....7-8
7.5.1 Capital Cost Financing....7-8
7.5.1.1 Federal Funding Programs....7-8
7.5.1.2 State Funding Programs....7-10
7.5.2 Debt Repayment and Operations and Maintenance Financing....7-10
7.5.3 Preliminary Reclaimed Water Rates for the City of Fort Worth 7-11
7.5.4 Projected Payback Periods for Reclaimed Water Projects 7-12

7.6 Feasibility Evaluation Summary 7-14

CHAPTER 8: PUBLIC INFORMATION PLAN....8-1

8.1 Introduction....8-1

8.2 Public Relations Issues Associated with Reclaimed Water Projects 8-1

8.3 Examples of Public Outreach Programs in Other Communities 8-1
8.3.1 Projects that Benefited from a Public Outreach Program....8-1
8.3.1.1 El Paso Water Utilities, Texas 8-1
8.3.1.2 Irvine Ranch Water District, California....8-2
8.3.1.3 Orange County, California....8-3
8.3.1.4 Phoenix, Arizona 8-3
8.3.1.5 Pinellas County, Florida 8-4
8.3.1.6 Scottsdale, Arizona 8-4
8.3.1.7 St. Petersburg, Florida 8-5
8.3.1.8 Yelm, Washington 8-5
8.3.2 Projects that Suffered Due to Poor Public Outreach....8-5
8.3.2.1 Cape Coral, Florida....8-5
8.3.2.2 City of San Diego, California 8-6

8.4 City of Fort Worth Reclaimed Water Priority and Implementation Plan Public Meetings 8-7

8.5 Public Information Committee 8-7

8.6 Proposed Public Information Program 8-8

8.6.1 Public Announcements and Responses 8-9

8.6.2 Public Information Documents 8-9

CHAPTER 9: RECLAIMED WATER IMPLEMENTATION PLAN 9-1

9.1 Introduction 9-1

9.2 Implementation Plan 9-1

9.2.1 Administrative Actions 9-1

9.2.1.1 Reclaimed Water Program Organization 9-1

9.2.1.2 Policies and Procedures 9-15

9.2.1.3 Update City Ordinances to Include Reclaimed Water Provisions 9-15

9.2.1.4 Reclaimed Water Customer Contract 9-16

9.2.1.5 Waterchase Golf Course Reclaimed Water Project Experience 9-17

9.2.1.6 Wastewater Treatment Plant Testing Program 9-17

9.2.1.7 Chapter 210 Reclaimed Use Notification 9-17

9.2.1.8 Public Information/Public Awareness Campaign 9-18

9.2.1.9 Reclaimed Water Marketing Efforts 9-18

9.2.2 Reclaimed Water Workgroup Goals and Accomplishments 9-19

9.3 Summary- Recommended Reclaimed Water Projects 9-20

APPENDICES

APPENDIX A SUMMARY OF TOP 100 WATER CUSTOMERS PROVIDED BY CITY OF FORT WORTH

APPENDIX B RECLAIMED WATER DEMANDS FROM DRAFT FEASIBILITY STUDY-MARY'S CREEK RECYCLING CENTER

APPENDIX C DRAFT TRANSMITTAL LETTER

APPENDIX D SAMPLE STANDARD QUESTIONNAIRE

APPENDIX E DETAILED COST BREAKDOWNS FOR RECOMMENDED RECLAIMED WATER ALTERNATIVES

APPENDIX F TECHNICAL MEMORANDUM SUMMARIZING ASSUMPTIONS USED IN DEVELOPING COSTS

APPENDIX G BENEFIT DEFERRAL CALCULATION

APPENDIX H SAMPLE BREAKDOWN OF ANNUAL PAYMENTS WITH AND WITHOUT STATE PARTICIPATION FUNDING

APPENDIX I GRAPHS OF ANNUAL COST BREAKDOWN AND PAYBACK POINT FOR EACH ALTERNATIVE

APPENDIX J GLOSSARY OF TERMS RELATED TO WATER REUSE

APPENDIX K FREQUENTLY ASKED QUESTIONS ABOUT WATER REUSE

APPENDIX L DRAFT PUBLIC INFORMATION DOCUMENTS

APPENDIX M CITY OF FORT WORTH CHAPTER 210 REUSE AUTHORIZATION

APPENDIX N DRAFT RECLAIMED WATER ORDINANCE

APPENDIX O DRAFT RECLAIMED WATER SERVICE AGREEMENTS

APPENDIX P TWDB COMMENTS AND RESPONSE TO COMMENTS- DRAFT FINAL REPORT

LIST OF TABLES

Table ES-1: Central System Reclaimed Water Service Area Demands ES-5

Table ES-2: Eastern System Reclaimed Water Service Area Demands ES-5

Table ES-3: Northern System Reclaimed Water Service Area Demands..... ES-6

Table ES-4: Southern System Reclaimed Water Service Area Demands..... ES-6

Table ES-5: Western System Reclaimed Water Service Area Demands..... ES-7

Table ES-6: Summary of Costs for All Service Areas (without benefits) ES-13

Table ES-7: Summary of Costs, Recommended Alternatives, Including Benefits..... ES-19

Table ES-8: Reclaimed Water Implementation Steps..... ES-25

Table 3-1: Comparison of Projected Populations Resulting from Various Approaches 3-2

Table 3-2: Summary of Currently Available Safe Yield Supplies to the TRWD* 3-4

Table 3-3: Comparison of Senate Bill 1 (SB1) and Master Plan (MP) Projections for Water Demand 3-5

Table 3-4: Projected Total Non-Coincidental Water Demands for the City of Fort Worth 3-6

Table 3-5: Projected Wastewater Flows for Village Creek WWTP* 3-7

Table 3-6: Projected Annual Average Flow Rates for DCRWS (MGD)*.....3-8

Table 4-1: Peaking Factors 4-4

Table 4-2: Non-Wholesale Customers Projected Water Demands.....4-6

Table 4-3: Hillwood Properties Projected Water Demands.....4-6

Table 4-4: Mary's Creek Basin Projected Water Demands for Year 2030 4-7

Table 4-5: Parks and Community Services Department.....4-9

Table 4-6: Top 125 Potential Reclaimed Water Users 4-10

Table 5-1: Water Quality Parameters for Different Water Reuse Applications 5-2

Table 6-1: Central System Reclaimed Water Service Area Demands.....6-3

Table 6-2: Eastern System Reclaimed Water Service Area Demands.....6-3

Table 6-3: Northern System Reclaimed Water Service Area Demands 6-4

Table 6-4: Southern System Reclaimed Water Service Area Demands 6-4

Table 6-5: Western System Reclaimed Water Service Area Demands 6-5

Table 6-6: Summary of Costs, Central/Southern System Alternatives (without benefits) 6-9

Table 6-7: Summary of Costs, Eastern System Alternative (without benefits) 6-10

Table 6-8: Summary of Costs, Northern System Alternatives (without benefits) 6-13

Table 6-9: Summary of Costs, Western System Alternative (without benefits).....6-15

Table 6-10: Summary of Costs for All Service Areas (without benefits).....6-15

Table 7-1: Summary of Costs, Recommended Alternatives- Without Benefits and Without Cost of Western System WRC 7-1

Table 7-2: Summary of Costs, Recommended Alternatives, Including Benefits 7-7

Table 7-3: Summary of Reclaimed Water Rates for Selected Utilities 7-12

Table 9-1: Summary of Recommended Reclaimed Water Projects and Costs.....9-2

Table 9-2: Reclaimed Water Program Implementation Steps 9-3

LIST OF FIGURES

Figure ES-1: Reclaimed Water Service Areas ES-4

Figure ES-2: Central/Southern System Alternatives ES-8

Figure ES-3: Eastern System Alternative ES-10

Figure ES-4: Northern System Alternatives ES-11

Figure ES-5: Western System Alternative ES-12

Figure ES-6: Central/Southern System Phasing ES-14

Figure ES-7: Eastern System Alternative Phasing ES-15

Figure ES-8: Northern System Alternative Phasing ES-16

Figure ES-9: Western System Alternative Phasing ES-17

Figure ES-10: Summary of Payback Period for Reclaimed Water Projects ES-22

Figures ES-11: Reclaimed Water Implementation Plan Phasing ES-29

Figures ES-12: Reclaimed Water Implementation Plan Detailed Timeline ES-31

Figure 3-1: Comparison of Population Projections for Fort Worth 3-3

Figure 3-2: Comparison of Senate Bill 1 and Master Plan Projections for Water Demand 3-6

Figure 3-3: Comparison of Wastewater Master Plan Data and Projections to Recent Flow Measurements, Village Creek WWTP 3-8

Figure 4-1 Top Potential Reclaimed Water Customers 4-13

Figure 5-1: Village Creek Water Quality Data for Reuse Constituents 5-3

Figure 5-2: CBOD, NH3 and TSS Data for DCRWS 5-3

Figure 5-3: Fecal Coliform Data for DCRWS 5-4

Figure 5-4: Nutritive Constituents in Village Creek Treated Effluent 5-5

Figure 5-5: Total Alkalinity and Total Hardness of Village Creek WWTP Treated Effluent 5-6

Figure 6-1: Reclaimed Water Service Areas 6-2

Figure 6-2: Central and Southern System Service Area Alternatives 6-8

Figure 6-3: Eastern System Alternatives 6-11

Figure 6-4: Northern System Alternatives 6-12

Figure 6-5: Western System Alternative 6-14

Figure 6-6: Central/Southern Alternative Phasing 6-17

Figure 6-7: Eastern Alternative Phasing 6-19

Figure 6-8: Northern System Alternative Phasing 6-21

Figure 6-9: Western System Alternative Phasing 6-23

Figure 6-10: Map Insert- All Proposed Reclaimed Water Projects 6-25

Figure 7-1: Projected Reduction in Per Capita Potable Water Usage Due to Reuse 7-2

Figure 7-2: City of Fort Worth Projected Water Treatment Needs With and Without Reuse Projects 7-5

Figure 7-3: Impact of Capital Contributions on Unit Cost of Reclaimed Water 7-9

Figure 7-4: Summary of Payback Period for Reclaimed Water Projects 7-14

Figure 7-5: Traditional vs. State Participation Financing, System-wide 7-15

Figure 9-1: Reclaimed Water Implementation Plan Phasing 9-9

Figure 9-2: Reclaimed Water Implementation Plan Detailed Timeline 9-11